


RACCORDI PER TERMOFUSIONE • TERMOFUSION FITTINGS

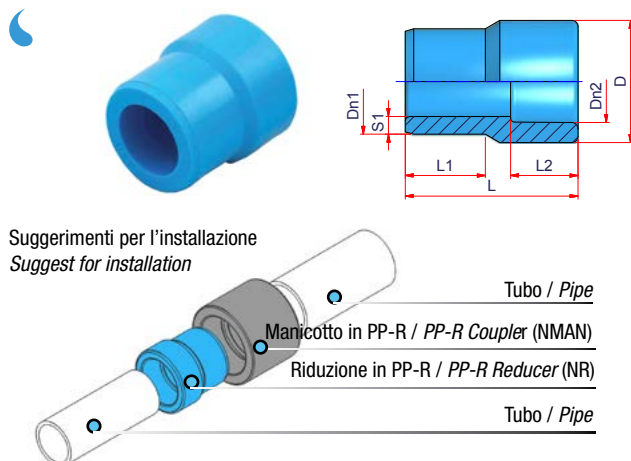


RIDUZIONE

Materiale: PP-R fino al ø63. Dal ø75 PP-RCT
 Norme: DIN 16962 - UNI EN ISO 15874
 Gamma: ø20-16 ÷ 125-110mm

REDUCING SOCKET

Material: PP-R until ø63. PP-RCT from ø75
 Standards: DIN 16962 - UNI EN ISO 15874
 Range: ø20-16 ÷ 125-110mm

Vecchio Codice Old Item Code	Nuovo Codice New Item Code	Ø	Pack	kg/p	Volume m³/p	Dn1	S1	Dn2	D	L1	L2	L
03NR2016	03NRD2016	20-16	150	0,009	0,0001	20	3,4	16	24	16	18	37
03NR2516	03NRD2516	25-16	100	0,015	0,0001	25	4,2	16	26	19	18	39
03NR2520	03NRD2520	25-20	100	0,015	0,0001	25	4,2	20	29	19	16	41
03NR3225	03NRD3225	32-25	80	0,023	0,0001	32	5,4	25	35	22	17	44
03NR4032	03NRD4032	40-32	40	0,042	0,0002	40	6,7	32	46	25	20	50
03NR5040	03NRD5040	50-40	40	0,061	0,0002	50	8,3	40	56	28	22	55
03NR6350	03NRD6350	63-50	20	0,120	0,0005	63	10,5	50	70	32	25	54
03NR7563	03NRD7563	75-63	12	0,195	0,0009	75	12,5	63	83	36	29	74
03NR9075	03NRD9075	90-75	18	0,233	0,0010	90	15	75	96	37	34	80
03NR11090	03NRD11090	110-90	6	0,250	0,0017	110	18,3	90	130	55	35	110
03NR125110	03NRD125110	125-110	4	0,575	0,0047	125	20,8	110	139	50	43	114

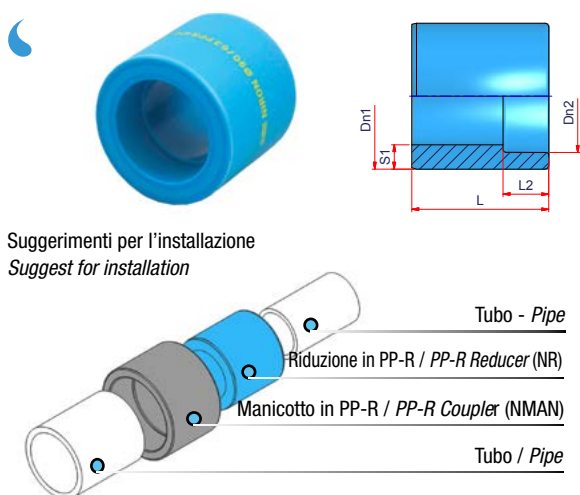

RIDUZIONE

Materiale: PP-R e PP-RCT
 Norme: DIN 16962 - UNI EN ISO 15874
 Gamma: ø90-63 ÷ 125-90mm

REDUCING SOCKET

Material: PP-R and PP-RCT
 Standards: DIN 16962 - UNI EN ISO 15874
 Range: ø90-63 ÷ 125-90mm

Vecchio Codice Old Item Code	Nuovo Codice New Item Code	Ø	Pack	kg/p	Volume m³/p	Dn1	S1	Dn2	L2	L
03NR9063	03NRD9063	90-63	10	0,250	0,0011	90	15,0	63	29	81
03NR11075	03NRD11075	110-75	25	0,356	0,0014	110	18,3	75	32	80
03NR12590	03NRD12590	125-90	8	0,688	0,0024	125	20,8	90	37	104

The dimensions specified may be subject to change.